

ES0808AC



This model is electrically driven and has a robust and mobile structure. The electric scissor lift system saves energy, ensuring zero emissions and a silent-running. It is ideal for indoor usages. The compact design and dimensions allow to pass through standard doors, ensuring maximum flexibility.



STANDARD EQUIPMENTS:

- AC batteries with IP67 waterproof system
- Automatic pothole protection system
- Crushing protection
- High ground clearance
- Self-locking door on the platform
- Speed limit at maximum height
- Automatic braking system
- Emergency brake release
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Cylinder locking valve
- Emergency stop button
- Emergency lowering
- Traction engine protection
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Power to platform

MAIN APPLICATIONS



Maintenance



Plant Service



Construction



Storage/
Warehouse



Cleaning






Painting/
Restoration

ES0808AC

| | |
|---|---|
| Load capacity | 380 kg |
| Load capacity when extended | 113 kg |
| Max no. Occupants (Indoor/outdoor) | 2/1 |
| A Working height | 8 m |
| B Platform floor level height | 6 m |
| C Overall length | 2.48 m |
| D Overall width | 0,83 m |
| E Overall height (rails up) | 2,23 m |
| Transport height (rails down) | 1,87 m |
| F Platform dimensions (length/width) | 2.27x0.81 m |
| G Platform extension | 0.9 m |
| Ground clearance (stowed) | 10 cm |
| Ground clearance (raised) | 1.9 cm |
| Wheelbase | 1.87 m |
| Turning radius (inside) | 0 cm |
| Turning radius (outside) | 2.10 m |
| Driving motors | 2x24VAC/0,87 kW |
| Lifting motors | 24 VAC/3,5 kW |
| Travel speed (stowed) | 5,0 km/h |
| Travel speed (raised) | 0,8 km/h |
| Batteries | 4x6 V/170 Ah AGM batteries maintenance free |
| Integrated battery charger | 24V/25A |
| Gradeability | 25% |
| Maximum working slope | 2°/3° |
| Non-marking tyres | 381x127 mm |
| Weight (CE) | 2,160 kg |

STANDARDS COMPLIANCE:
EN 280, ANSI/SAIA A92.20

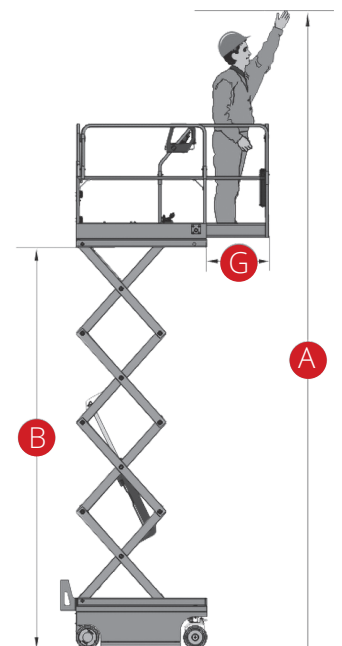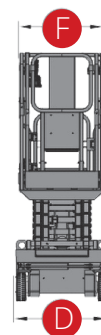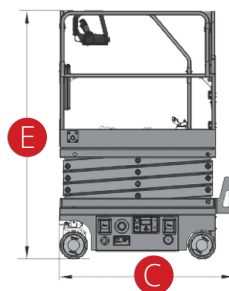

Non-marking solid tyres



Safety bracket